

# ht 3-in-1 Square Drive Attachment

The HTL Square Drive Torque Wrench Attachment is part of HTL's innovative 3-in-1 Hydraulic Torque Wrench range and works with HTL's range of 'W' Low Profile Hydraulic Torque Wrenches.

Due to its innovative design and the high quality materials used, this tool is extremely durable and easy to operate. A 360 degree, fully adjustable in-line reaction arm ensures the operator can select a reaction point to suit any application.

With square drive attachment sizes available from  $^{3}/_{4}$ " to 2  $^{1}/_{2}$ " and torque ranges from 149 to 29,267 lbf.ft (202 to 39,681 Nm) the HTL Square Drive Torque Wrench Attachment is suitable for a wide range of applications.

#### Interchangeable and Cross Compatible Design

The design ensures that the operator can interchange ratchet links with many other well-known brands.

#### Features and Benefits

- / Interchangeable with other manufacturers
- Fully adjustable 360 degree in-line reaction arm
- Push button, quick release, reversible square drive
- Fine tooth rachet prevents locking-on
- Square drive sizes from 3/4" to 2 1/2


















### **Technical Information**

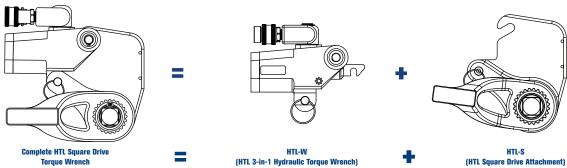

Torque Wienen			(III C III I IIyuraulic	-	(ITTE Square Drive Attachment)		
Model			HTL-S2	HTL-S4	HTL-S8	HTL-S14	HTL-S30
Torque Wrench			HTL-W2	HTL-W4	HTL-W8	HTL-W14	HTL-W30
Square Size Inches		Inches	3/4"	1"	1 1/2"	1 1/2"	2 1/2"
lbf.ft Min Torque Nm		lbf.ft	149	342	698	1246	2710
		Nm	202	464	946	1690	3675
		lbf.ft	1541	3543	7562	12924	29267
Max Torque Nm		Nm	2089	4804	10252	17522	39681
	HTL-S	Kg	2.7	4.1	8.2	13.5	40
Weight	HTL-W	Kg	1.0	1.8	3.2	5.1	11.4
mm		mm	175	212	267	311	435
A Inch		Inch	6.9	8.4	10.5	12.2	17.1
mm		mm	160	205	254	297	390
B Inch		Inch	6.3	8.1	10	11.7	15.4
mm		mm	48.5	65.5	80	99	135
C Inch		Inch	1.9	2.6	3.1	3.9	5.3
mm		mm	35	38.5	50.5	58	88
D Inch		Inch	1.4	1.5	2.0	2.3	3.5
		mm	60	78	110	125	205
E Inch		Inch	2.4	3.1	4.3	4.9	8.1
		mm	120	148	210	220	360
F Inch		Inch	4.7	5.8	8.3	8.7	14.2
		mm	85.5	110	160.5	162.5	244
G Inch		Inch	3.4	4.3	6.3	6.4	9.6





PLEASE NOTE: Figures provided are for guidance only, please refer to individual tool charts. All data is given in good faith and without acceptance of responsibility on the part of HTL.

## **GLOBAL EXCELLENCE IN CONTROLLED BOLTING**



HTL Group Ltd 45 Colbourne Avenue, Nelson Park Industrial Estate, Cramlington, Northumberland, NE23 1WD Telephone: +44 (0) 1670 700 000 Email: info@htlgroup.com









